

**Impressively Smooth Roll!**






**Heli-Mini Dollies**

For **Universal Use**

HMD-STD4 & HMD-STD4-LCK



**New**  
Heli-Mini-Dollies

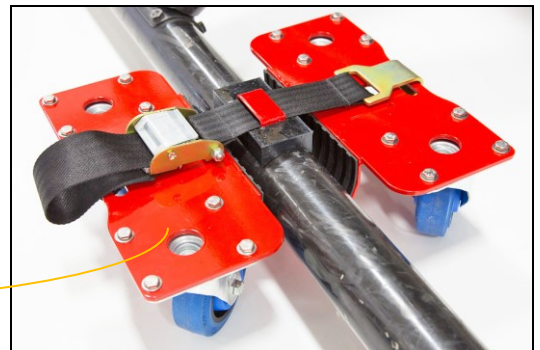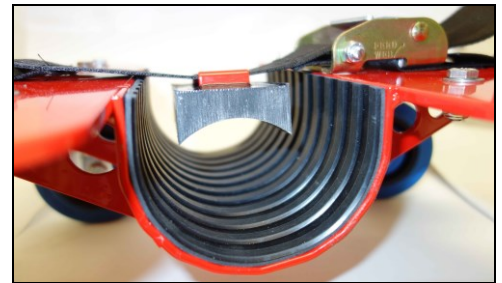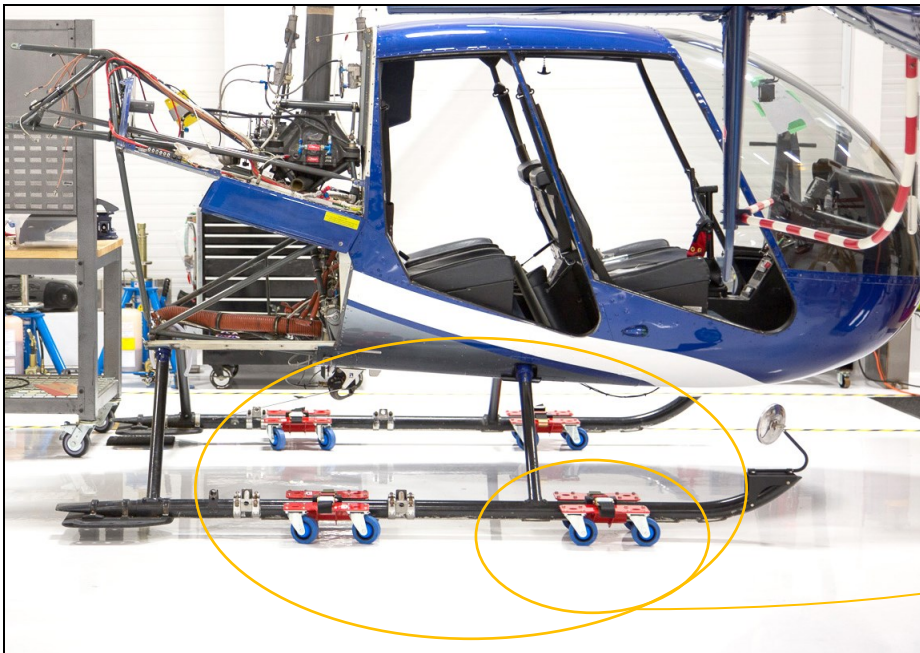

**For Better Hangar & Handling Efficiency**

Supports skids at front to alleviate manual handling efforts  
Optimizes hangar space for maintenance & overhauls

**Sturdy Construction & Extra Smooth Roll**

Keeps skid securely in line even when heli nose is lifted up  
With High Load Capability to serve most helicopters  
High Quality Dependable Device

Specifications	Models	
<p><b>Capacity:</b> 2500lbs (1135kg) per pair. <b>Skid Diameter:</b> 2.25"- 3.87" (6 to 10 cm)</p> <p>Casters 4" (100mm) Height: 5.12" (13cm) Skid Height: 2.3" (6cm). Frame: Painted Steel</p> <p><b>Attachment:</b> 2"(5cm) wide belt &amp; cam buckle fitted with a Polyurethane Skid Retainer to maintain skid alignment when lifting skid off ground.</p>	<p><b>HMD-STD4</b></p>  <p>Dimensions: 12" x 14.25" (30cm x 36cm)</p>	<p><b>HMD-STD4-LCK – With 2 Locks</b></p>  <p>Dim.: 14.25" x 16.12" (36cm x 41cm)</p>

## Specifications

### Casters:

Load Capacity: Each 330 lbs (150 kg).

Wheel Inner Rim: High quality Impact Resistant Nylon. Vulcanised Center.

Swivel Wheels: High quality Elastic Solid Rubber for smooth roll with low-noise operation & low rolling resistance.

Wheel Brackets: Made of pressed steel with double ball bearing in the swivel head.

Ball protection by the special top plate and ball disc design.

Riveting with minimal swivel head play.

Smooth rolling characteristics providing increased life service achieved by hardening of ball race grooves.

Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

### Shipping:

Each kit includes a pair of Heli-Mini-Dollies.

Ships in one 20 x 20 x12 inch box (51 x 51 x 31 cm), Package:42 lbs (19kg).

